




CE MODEL | SJ 9250

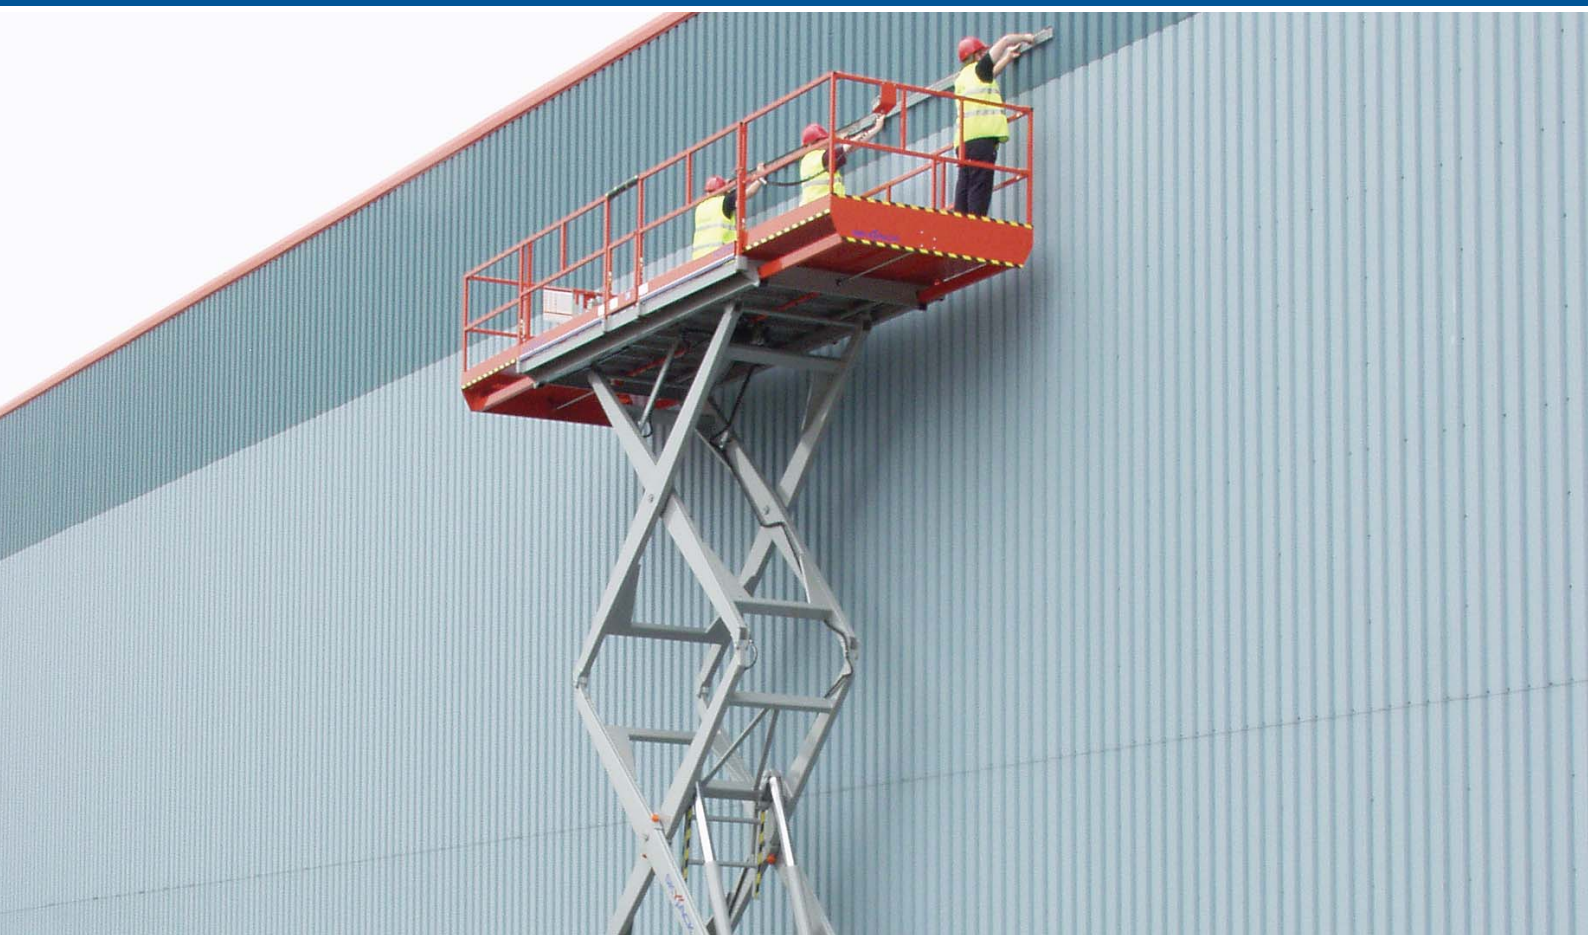


## FULL SIZE SERIES Rough Terrain SCISSOR LIFTS

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities— all in one package!

The SJ 9250 features an expansive platform, up to 4,3 m in length, when optional 1,52 m powered extension decks are added to the front and back of unit. With a working height of 17,2 m and standard independant/auto leveling outriggers, the SJ 9250 can meet the challenge of any job site.


As with every Skyjack model, these units use an analog based control system, featuring Skyjack's standard colour coded and numbered wiring, for ease of troubleshooting.

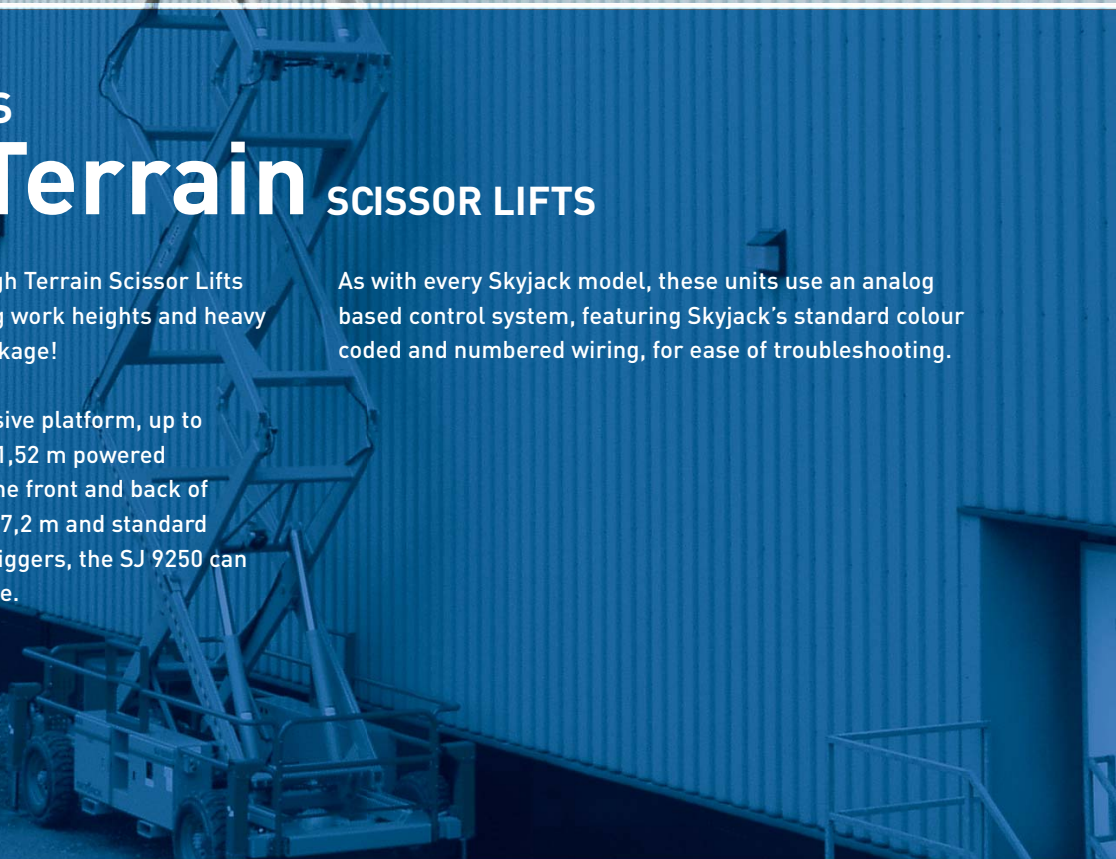

## FULL-SIZE SERIES

# Rough Terrain Scissor Lifts

Specifications	SJ 9250
<b>A Work Height</b>	17,2 m
<b>B Raised Platform Height</b>	15,2 m
<b>C Lowered Platform Height</b>	2,0 m
<b>D Overall Width</b>	2,3 m
<b>E Overall Length</b>	4,5 m
<b>F Stowed Height (Rails Up)</b>	3,2 m
<b>G Stowed Height (Rails Down)</b>	2,3 m
<b>H Platform Width (Inside Dimension)</b>	1,9 m
<b>I Platform Length (Inside Dimension)</b>	4,3 m
Ground Clearance	0,2 m
<b>Wheelbase</b>	3,0 m
<b>Weight</b>	6818 kg
<b>Gradeability</b>	30%
<b>Turning Radius (Inside)</b>	5,3 m
<b>Turning Radius (Outside)</b>	7,7 m
<b>Lift Time (With Rated Load)</b>	67 sec
<b>Drive Speed (Stowed)</b>	3,2 km/h
<b>Drive Speed (Raised)</b>	1 km/h
<b>Maximum Drive Height</b>	7,9 m
<b>Capacity (Overall)</b>	907 kg
<b>Maximum # of Persons</b>	5

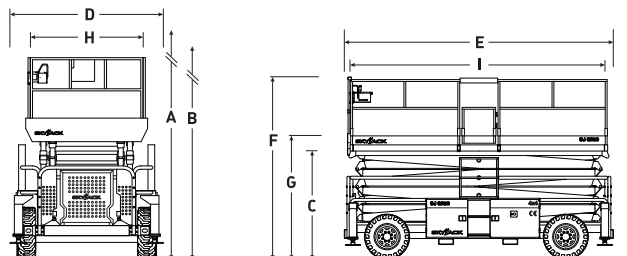

### STANDARD FEATURES

- Drivable at full height (12,5 m)
- Axle based 4WD
- "No Spin" rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota diesel engine on roll out tray
- Self-centering scissor design
- Dual powered extension decks (1,5m front and rear)
- Large 7,3 m total working deck length
- Independent/auto leveling outriggers
- Analog control system
- Color coded and numbered wiring system
- 30% gradeability
- Grip lug foam filled tyres
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Overload sensing system
- Lowering warning system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Scissor guards
- Lanyard attachment points
- Tie down/lift lugs

### OPTIONS†

- 1,5 m powered extension deck (single or dual)
- Diesel engine with scrubber
- Shop airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres

† Capacities, and machine weights may differ when options are added

Model	Capacity With 1 Extension Deck*		Capacity With 2 Extension Decks*		
	Main	Front Ext.	Main	Front Ext.	Rear Ext.
SJ 9250	454 kg	227 kg	227 kg	227 kg	227 kg

### Skyjack UK

Unit 1, Maes-y-Clawdd  
 Maesbury Road Industrial Estate  
 Oswestry, Shropshire, SY10 8NN  
 Phone: +44-1691-676235  
 Fax: +44-1691-676239  
 Email: info@skyjackeurope.co.uk

[www.skyjack.com](http://www.skyjack.com)

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to the Machinery Directive 98/37/EC.