


## GP500 SPECIFICATIONS

### WELFARE

### GP500

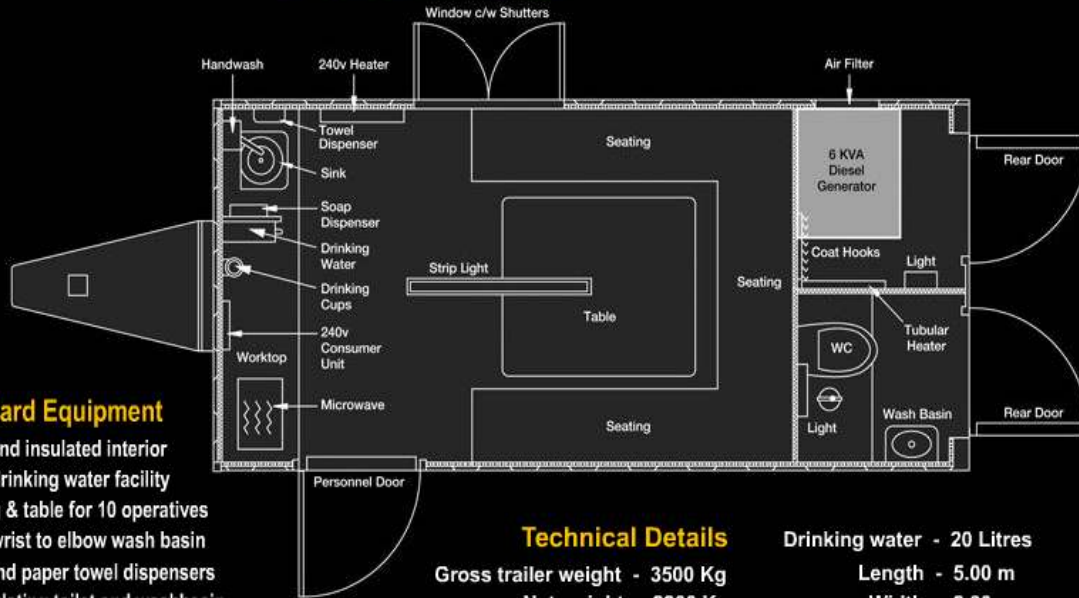

#### Standard Equipment

- Lined and insulated interior
- Clean drinking water facility
- Seating & table for 10 operatives
- Large wrist to elbow wash basin
- Soap and paper towel dispensers
- Recirculating toilet and washbasin
- Facility for storage of wet clothing
- Electric lighting, microwave and warm hand wash
- 6 kVA silenced diesel generator

#### Technical Details

- Gross trailer weight - 3500 Kg
- Net weight - 2200 Kg
- Diesel tank capacity - 48 Litres
- Fresh water - 25 Litres
- Waste capacity - 25 Litres

- Drinking water - 20 Litres
- Length - 5.00 m
- Width - 2.30 m
- Height - 2.37 m
- Towing L - 6.60 m
- Towing H - 2.69 m

FEATURES	BENEFITS		FEATURES	BENEFITS
Heavy Duty GRP interior panels	Hardwearing		Steel personnel doors with double point locking and hidden hinges	Secure / prevention against vandalism
Block insulation	Reduce heat loss		Aluminium sliding window with sliding steel shutter	Secure / helps create a more comfortable environment
Heavy duty floor covering	Hardwearing / easy to clean		Double point locking mechanism	High level of security against theft
Consumer unit	Capability of isolating individual electrical items		Large sink	Complies to <b>HSE requirement</b> for elbow to wrist washing
RCD	Reduce the risk of injury due to earth fault		Hot water unit	Gives instant flowing hot water
MCB'S	Reduce the risk of overloading		Base unit	Convenient storage area
Strip light	Illuminates welfare area		Worktop	Convenient for preparing meals
Bulkhead lights	Illuminates toilet and drying room		Table	Enhance welfare area
Electric wall mounted heater	Space saving / makes for a comfortable welfare area		Bench seating with underside storage	Space saving / convenient storage
Double sockets	Flexibility to run additional electrical equipment i.e. cellular phone charger		Microwave	Hot food
Tubular heater (Drying room)	Money saving / Dry clothes for operatives <b>HSE requirement</b>		Clean drinking water	<b>HSE requirement</b>
			Recirculating toilet	Hygienic / <b>HSE requirement</b>
			Recirculating wash hand basin (30 gallons)	Hygienic / <b>HSE requirement</b>
			External flood lighting (optional)	Safe working area / enable to work longer days